

PLUG INTO PELCO IP

IP3701 SERIES COLOR NETWORK CAMERA



IP3701 Series Color Network Cameras add value to existing IT and security investments. Built upon an open architecture, users can view and control these reliable and affordable cameras with a standard web browser, Endura network-based video security systems, or through third-party software.

Convenient Power over Ethernet (PoE) makes IP3701 installation easy and cost effective, extended dynamic range guarantees clear images in extreme lighting environments, and the distinctive design is ideal for use in confined spaces.

IP3701 Series Color Network Cameras are here, and the possibilities are wide open.



VIEW IMAGES ON THE
GO WITH YOUR PDA.



ENDURA ENABLED




PROTECTING PEOPLE AND PROPERTY IN A MILLION LOCATIONS WORLDWIDE
TO CONTACT A PELCO SALES REPRESENTATIVE, CALL (800)289-9100 OR (559)292-1981
WORLDWIDE HEADQUARTERS 3500 PELCO WAY, CLOVIS, CALIFORNIA USA 93612

[PELCO.COM](http://pelco.com)


THIRD PARTY COMPATIBILITY

IP3701 SERIES SUPPORTS APPLICATION PROGRAMMING INTERFACE (API) FOR CUSTOMIZED SOFTWARE SOLUTIONS, GIVING USERS THE FLEXIBILITY TO USE THIRD-PARTY PRODUCTS. IP3701 IS FULLY COMPATIBLE WITH MILESTONE, THE LEADING GLOBAL PROVIDER OF OPEN PLATFORM IP VIDEO SURVEILLANCE MANAGEMENT SOFTWARE.

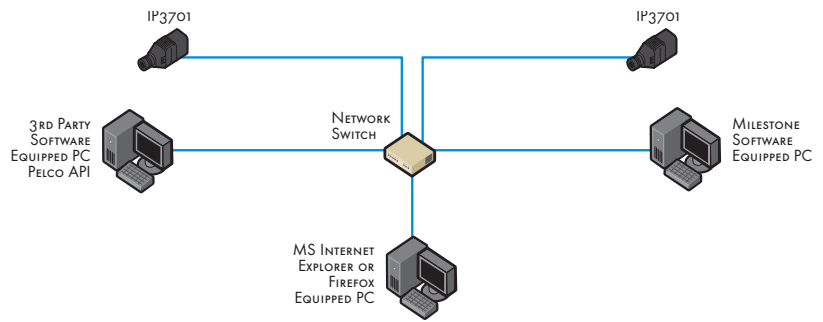


WEB BROWSER

CONNECT THE IP3701 SERIES THROUGH A NETWORK SWITCH AND VIEW VIDEO THROUGH ANY MS INTERNET EXPLORER OR FIREFOX EQUIPPED PC. SIMPLY ENTER THE USER DEFINABLE IP ADDRESS OF THE IP3701 CAMERA SYSTEM INTO THE WEB BROWSER, UTILIZE THE MULTILEVEL PASSWORD PROTECTION, AND MANAGE VIDEO FROM ANYWHERE IN THE WORLD.

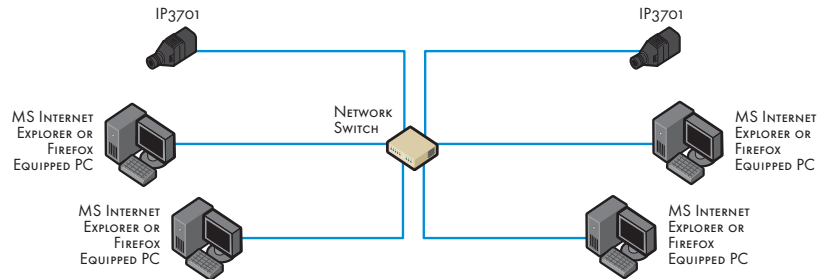

ENDURA

WHEN CONNECTED TO AN ENDURA NETWORK-BASED VIDEO SECURITY SYSTEM, THE IP3701 SERIES HAS ACCESS TO PELCO EXCLUSIVE ENDURASTOR™ AND ENDURAVIEW™ FOR OPTIMIZED IMAGE QUALITY AND BANDWIDTH EFFICIENCY. ENDURASTOR DRAMATICALLY EXTENDS THE RECORDING DURATION AT LOWER FRAME RATES, AND ENDURAVIEW CONSISTENTLY MONITORS AND AUTOMATICALLY ADJUST THE SYSTEM FOR THE BEST PICTURE POSSIBLE.

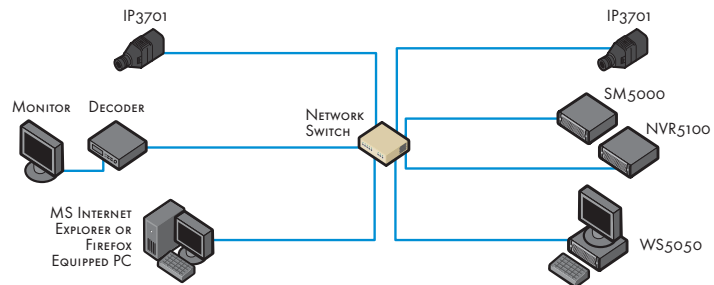

IP3701 FEATURES

- PoE AND 24 VAC POWER INPUT
- OPEN ARCHITECTURE
- MULTILEVEL PASSWORD PROTECTION
- UP TO 4CIF 704X480 RESOLUTION
- EXTENDED DYNAMIC RANGE
- THREE SIMULTANEOUS VIDEO STREAMS
 - DUAL MPEG-4 (30 FPS)
 - MJPEG



PROTECTING PEOPLE AND PROPERTY IN A MILLION LOCATIONS WORLDWIDE

TO CONTACT A PELCO SALES REPRESENTATIVE, CALL (800)289-9100 OR (559)292-1981
WORLDWIDE HEADQUARTERS 3500 PELCO WAY, CLOVIS, CALIFORNIA USA 93612 PELCO.COM