

PELCO

CAMCLOSURE™ 

WIDE OPEN POSSIBILITIES



IP110 Series Camclosure
Network Camera Systems

Plug the Power of Pelco Directly
into Your Ethernet Network



The Camclosure IP Advantage

Mitigate risk, both physically and financially, with the new Pelco Camclosure IP Network Camera Systems. By leveraging existing network infrastructure, the new IP110 Series Camclosure adds value to your IT and security investment. These network camera systems come standard with Power over Ethernet (PoE), enabling both power and video to transmit on a single cable. Reduced cabling requirements make installation faster, easier, and cost effective. And because Camclosure IP systems feature new pixel-based imagers, security personnel work with images with astonishing detail, regardless of the lighting condition.


Built upon an open architecture with a built-in web-server, Camclosure IP systems can be viewed and controlled with a standard web browser, as part of Pelco enterprise class Endura system, or through third-party software. Camclosure IP features triple-stream capability, allowing users to record, manage, configure and view three video streams simultaneously for predictable bandwidth control. Dual MPEG-scaleable (30 IPS) streams along with a scaleable MJPEG stream maximize viewing flexibility.

Camclosure IP Network Camera Systems are backed by Pelco's legendary 100% customer satisfaction guarantee. Pelco offers the widest array of customer service programs in the video security industry, including: Guaranteed Ship Dates, 24-hour Technical Assistance, and 24-hour Turnaround on Replacement Parts and Repairs. At Pelco, we will whatever it takes to fully satisfy every customer, every time.



The Options are Wide Open

IP110 Series Camclosure systems are available with multiple lens and camera options including Day/Night Wide Dynamic Range (WDR), Day/Night High Resolution, Color WDR, and Color High Resolution. New WDR pixel-based imagers digitize light at the point of capture, producing remarkably clear images in any lighting condition. Digital video has never looked this good.

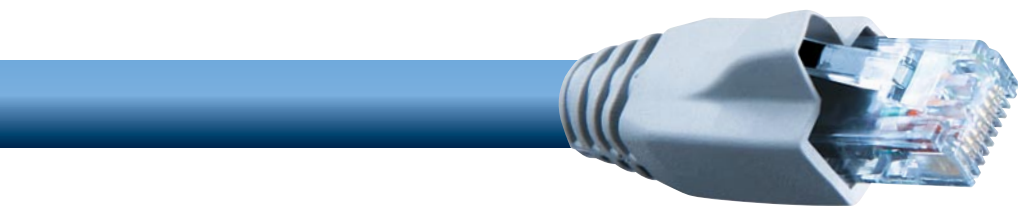

CAMERA TYPE	LOWER DOME	LENS	LENS TYPE	NTSC	PAL
Day/Night, WDR	SMOKED	3-9 MM	VARIFOVAL, AUTO IRIS	IP110-DWV9	
		9-22 MM		IP110-DWV22	
Day/Night, WDR	CLEAR	3-9 MM	VARIFOVAL, AUTO IRIS	IP111-DWV9	
		9-22 MM		IP111-DWV22	
Day/Night	SMOKED	3-9 MM	VARIFOVAL, AUTO IRIS	IP110-DNV9	IP110-DNV9X
		9-22 MM		IP110-DNV22	IP110-DNV22X
Day/Night	CLEAR	3-9 MM	VARIFOVAL, AUTO IRIS	IP111-DNV9	IP111-DNV9X
		9-22 MM		IP111-DNV22	IP111-DNV22X
Color, WDR	SMOKED	3-9 MM	VARIFOVAL, AUTO IRIS	IP110-CWV9	
		9-22 MM		IP110-CWV22	
Color, WDR	CLEAR	3-9 MM	VARIFOVAL, AUTO IRIS	IP111-CWV9	
		9-22 MM		IP111-CWV22	
Color, High Resolution	SMOKED	3-9 MM	VARIFOVAL, AUTO IRIS	IP110-CHV9	IP110-CHV9X
		9-22 MM		IP110-CHV22	IP110-CHV22X
Color, High Resolution	CLEAR	3-9 MM	VARIFOVAL, AUTO IRIS	IP111-CHV9	IP111-CHV9X
		9-22 MM		IP111-CHV22	IP111-CHV22X

Cameras for all Light Conditions

Day/Night Wide Dynamic Range – Engineered to adjust for extreme light changes, Camclosure IP Day/Night with WDR gives the end-user the maximum benefit for any environment – indoor, outdoor, extreme light or low light.

Day/Night High Resolution – Capture crystal-clear images, whether the scene is lit by bright sunlight or dim moonlight. These systems are the definitive choice for around-the-clock security.


Wide Dynamic Range (WDR) – WDR systems digitize light at the point of capture, producing clear, discernable images even when extremely light and dark objects appear in the same scene.

High Resolution – The affordable, dependable choice for indoor and outdoor application with more manageable lighting conditions requiring sharp detail.




Endura

When connected to an Endura network-based video security system, the IP110 Series Camclosure has access to Pelco exclusive EnduraStor™ and EnduraView™ for optimized image quality and bandwidth efficiency. EnduraStor dramatically extends the recording duration at lower frame rate, and EnduraView constantly monitors and automatically adjust the system for the best picture possible.

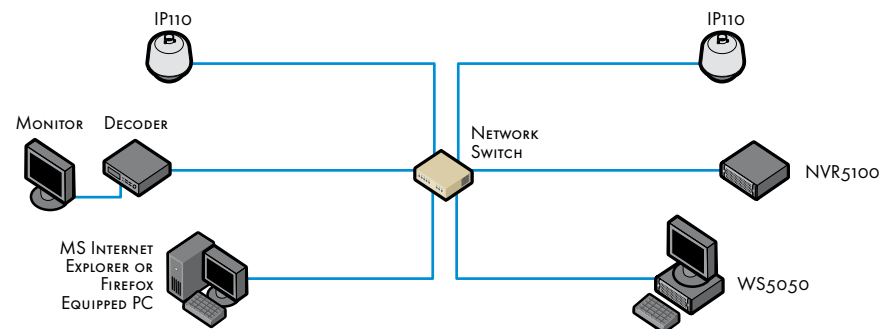


Web Browser

Connect the Camclosure IP through a network switch and view video through any MS Internet Explorer or FireFox equipped PC. Simply enter the user definable IP address of the Camclosure IP camera system into the web browser, utilize the multilevel password protection, and manage video from anywhere in the world.

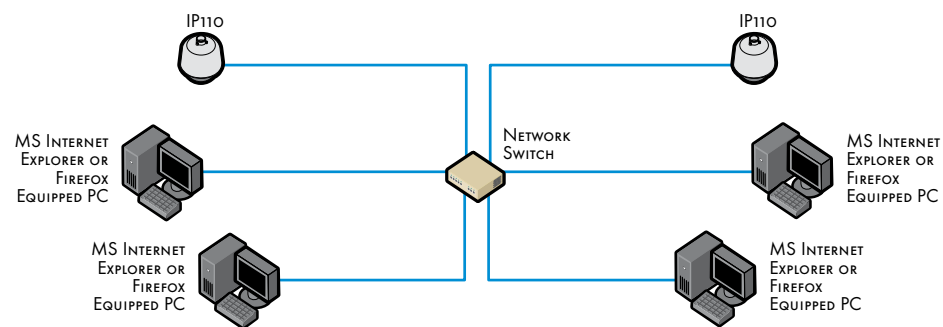


Third Party Compatibility

The IP110 Series Camclosure supports Application Programming Interface (API) for customized software solutions, giving users the flexibility to use third-party products. For example, Camclosure IP Network Camera Systems are fully compatible with Milestone, the leading global provider of open platform IP video surveillance management software.

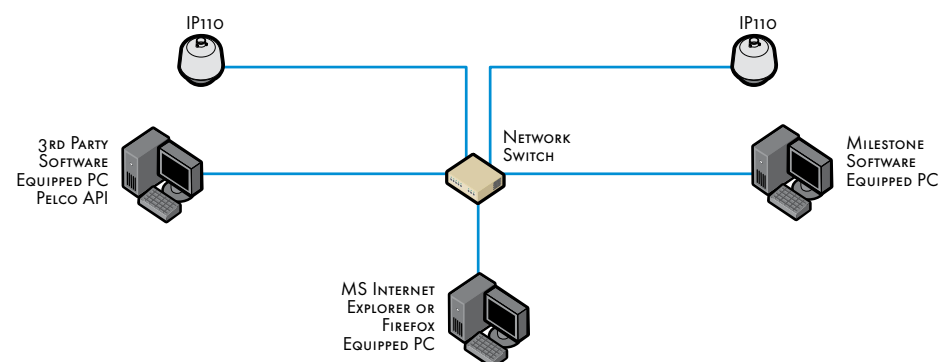

IP110 Series Camclosure Features

- PoE and 24 VAC Power Input
- Open Architecture
- Camera and Lens Options for Low Light Sensitivity, Extreme Lighting and Ultra High Resolution
 - Day/Night WDR
 - Day/Night High Resolution
 - Color WDR
 - Color High Resolution
- Three Simultaneous Video Streams
 - Dual MPEG-4 (30 FPS)
 - MJPEG
- Multi Level Password Protection
- Weatherproof, Puncture Proof Bubble; Tamper-Resistant Hardware
- Includes Video Service Connector for On-Site Setup
- Alarm Input and Output

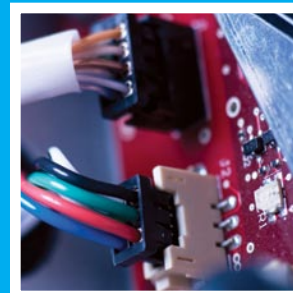



PELCO

Worldwide Headquarters 3500 Pelco Way Clovis, California 93612 USA
Tel (800) 289-9100 Fax (800) 289-9150 Int'l Tel (559) 292-1981 Int'l Fax (559) 348-1120 pelco.com/ipcam C5035-B

Australia Canada Finland France Germany Italy Macau The Netherlands Russia Singapore South Africa Spain Sweden United Arab Emirates United Kingdom United States